





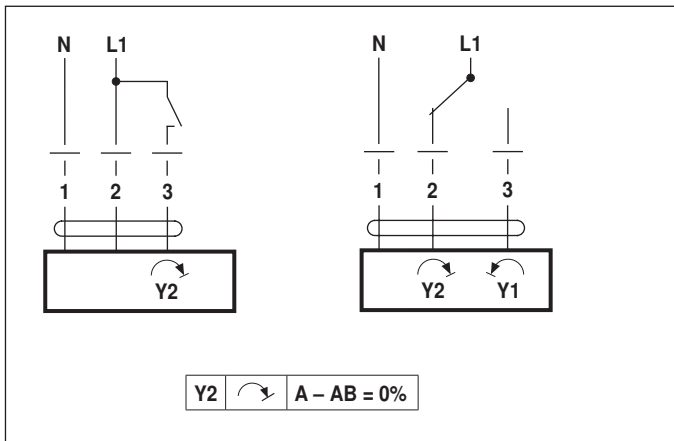

TRY230

71095-00001.B

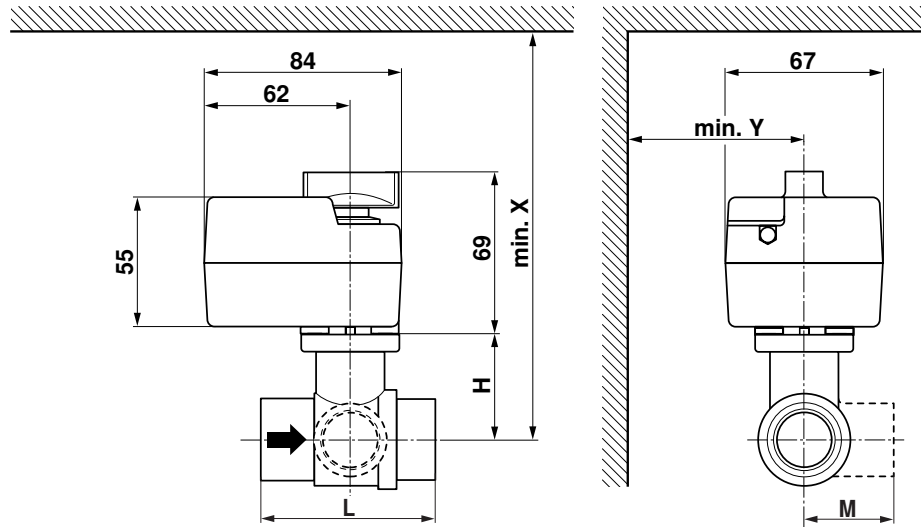



		°C	DN		Rp	G	PN	mm					
			max.	mm				"	"	"	"	L	H
												X	Y
R2..	R3..	100	15	1/2	1/2			67	45	39	184	75	
R4..	R5..	100	15	1/2		1		74	44	38	183	75	
R6..R	R7..R	100	15	1/2			6	101.5	45	73	184	80	
R4..DK		130	10	3/8		3/4		65	38	13	177	75	



AC 230 V






www.belimo.com

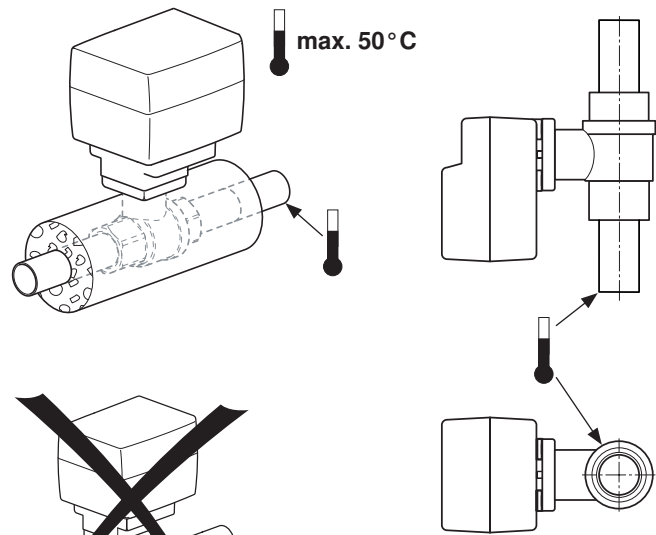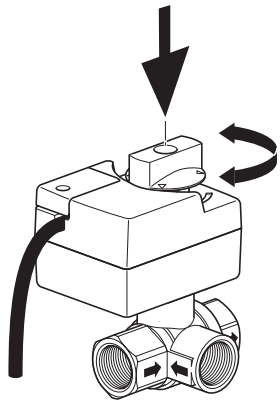

max. 50°C

	R2..	R3..	max. 100°C
	R4..	R5..	max. 100°C
	R6..R	R7..R	max. 100°C
	R4..DK		max. 130°C

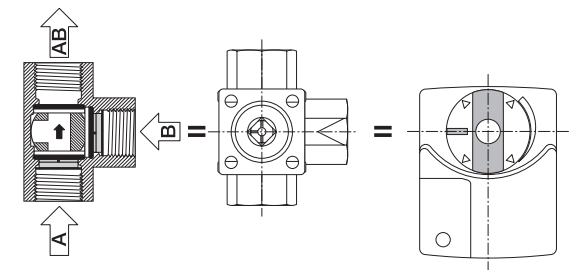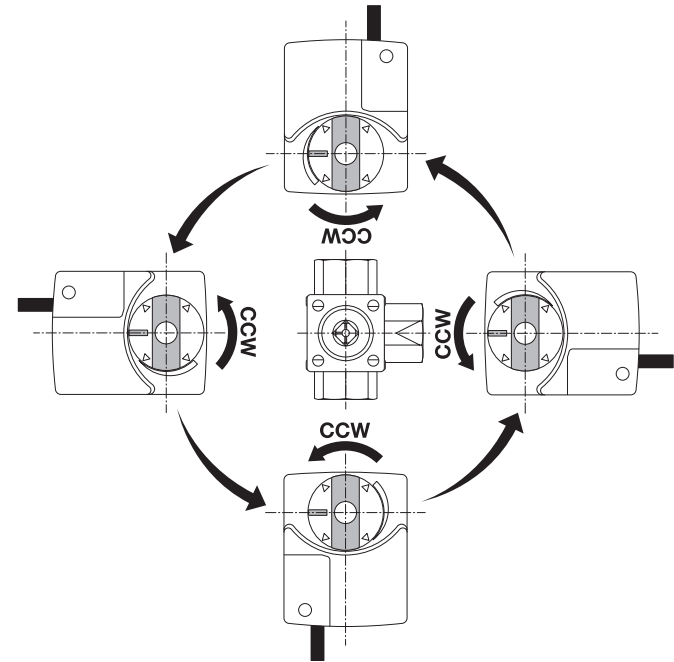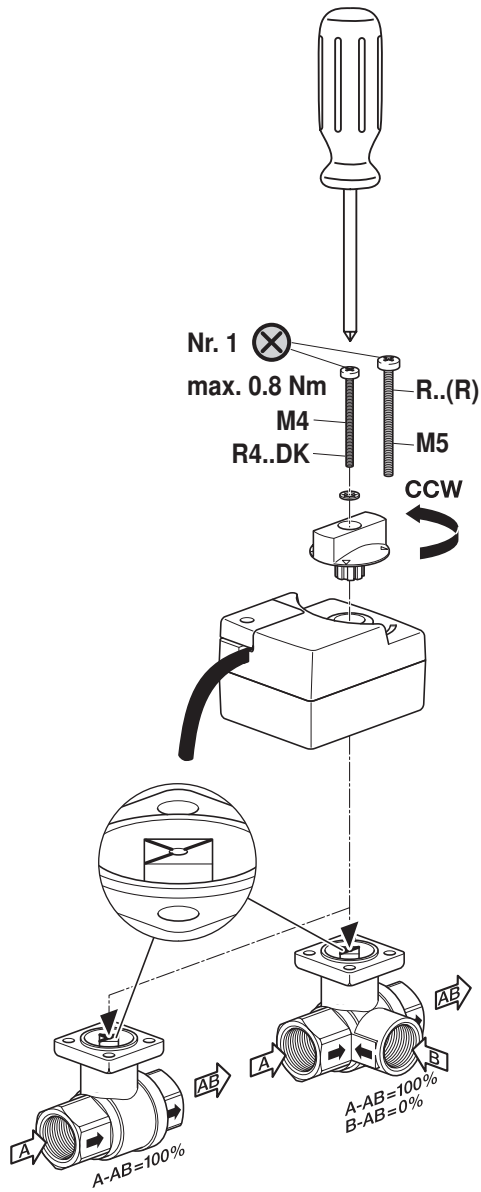

AC 230 V



www.belimo.com